Skyjack Head Office

55 Campbell Rd. Guelph, ON Canada N1H 1B9

Sales Inquiries: 1-877-755-4387 (1-877-SJLIFTS) Main Switchboard: 1-800-265-2738 Tel: 519-837-0888 Fax: 519-837-8104 Email: skyjack@skyjack.com



EFFICIENCY THROUGH VERSATILITY

Designed for the rental market, the SJ519 TH is a true multipurpose telehandler. With the combination of its capabilities and available attachments, the SJ519 TH provides you with a truly versatile machine that delivers all the job site functionality that is expected of a compact telehandler. Whether you need to lift material to height, work as a tool carrier or maneuver in tight spaces, Skyjack's SJ519 TH exceeds the on-site job performance that fleet managers and operators are accustomed to.

skyjack SJ519 TH

NA/ENG/01/2018







This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures. Work platforms have been tested to comply with ANSI and CSA standards as interpreted by Skyjack, Inc.



LITTLE BIG CAB

If the operator's cab on the SJ519 TH looks familiar, don't be confused - it should! Staying consistent with the TH Series when designing Skyjack's new compact telehandler, it was imperative that the term 'compact' would not have an impact on the operator. With a cab door that fully opens, operators can access the cab with ease, increasing total operator space. As a result of class-leading operator space, the SJ519 TH does not require tilt steering as a standard feature, which is a common feature among its category class.





SPECIFICATIONS

Maximum Lift Capacity
Maximum Lift Height
Rated Lift Capacity @ Maximum Height
Maximum Forward Reach
Rated Lift Capacity @ Maximum Forward Reach
A Length (Stowed - without forks)
B Width
C Height (Stowed)
Engine
Torque
Transmission



FLEXCAB.

- Available conversion kit to convert open cab units to closed cab in less than 2 hours with standard tools
- Bolt on/bolt off flat plane cab glass for easy and economical replacement of broken glass
- Bolt on/bolt off door hinges and drop on door for easy and economical damage repair


MACHINE OPTIONS

- Closed cab
- Partially enclosed cab
- Road lights Work & boom lights
- Back up sensor
- Four wheel fender set
- Fire extinguisher bracket
 Tilt steering
- Cold weather package
- Positive air shut-off valve
- Service convenience package
- Non destructive testing
- Back up camera & sensor
 Drive speed dial

Rotating beacon

- Hydraulic carriage connect

+ Capacities, and machine weights may differ when options are added.

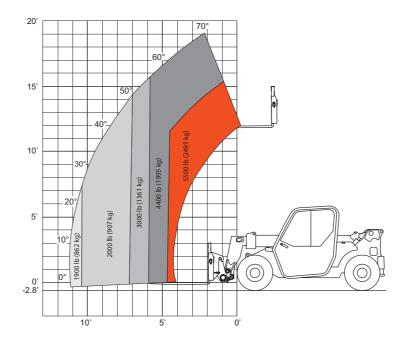

SIMPLE, SERVICEABLE, RELIABLE, SKYJACK.

- Accessible engine bay with full opening steel cowling
- Deutz engine, hydrostatic drive and Dana axles
- Modular cab, easily convert from open to closed in rental yard
- Cast rear counterweight with hitch pin incorporated as standard
- Standard yoke mounted lift shackle and quick attach carriages
- Simple control panel design in-line with TH Series and in-cab engine multifunction display standard

The new SJ519 TH remains consistent with Skyjack's core values of providing easily serviceable and reliable machines. Designed with an oversized engine bay and a fully opening steel cowling, all major service points are easily accessible. Keeping the importance of decreased downtime in mind, the SJ519 TH's parts are easy to access and replace, which provides a leading return on investment for fleet managers. This is all coupled with Skyjack's leading 2-year comprehensive warranty program.

21213	н
5,500 lbs (2,	500 kg)
19' 1" (5.8	82 m)
4,400 lbs (2,	000 kg)
11' 2.5" (3.4	44 m)
1,900 lbs (8	62 kg)
13' 0.5" (3.	97 m)
5' 11.5" (1.5	81 m)
6' 3" (1.9	9 m)
74hp Deutz TC	D2.2L T4F
184 lb-	-ft
Hydrostatic	
48" Side shift or side tilt	TIRE OPTIONS (12X16

- Pallet forks, 1.5x4x48" or 60" Foam filled tires
- 48" Block forks
- 48" Fully tapered forks Skid steer attachment
- 6' Truss boom
- 66" Bucket

- Air filled tires
- Solid rubber
- Non-marking solid
- Non-marking air filled
- Non-marking foam filled

Pintle hitch



SKYJACK

SJ519 TH